


GS 200-12 WS

## Scissor lift 20m

<b>Max. Working height</b>	19,86 m
<b>Movable up to working height</b>	19,70 m
<b>Max. Platform height</b>	17,86 m
<b>Max. Basket load / Lifting load</b>	600 kg
<b>Platform dimensions LxW</b>	3,87 x 1,16 m
<b>Platform length extended</b>	5,37 m
<b>Max. Lifting load on extension</b>	600 kg
<b>Overall dimensions LxW</b>	4,50 x 1,23 m
<b>Construction width</b>	1,23 m
<b>Transport position height</b>	2,60 m
<b>Transport height with/without railing</b>	3,48 / 2,60 m
<b>Dead weight</b>	9360 kg
<b>Drive type</b>	Battery
<b>Four-wheel drive</b>	no
<b>Indoor use only</b>	no
<b>Non-Marking</b>	yes
<b>Ground clearance</b>	0,12 m
<b>Supports</b>	yes
<b>Swing axle</b>	no
<b>Special features</b>	Supports, very narrow device, high lifting load, attachment points for restraint systems (PPE) available!

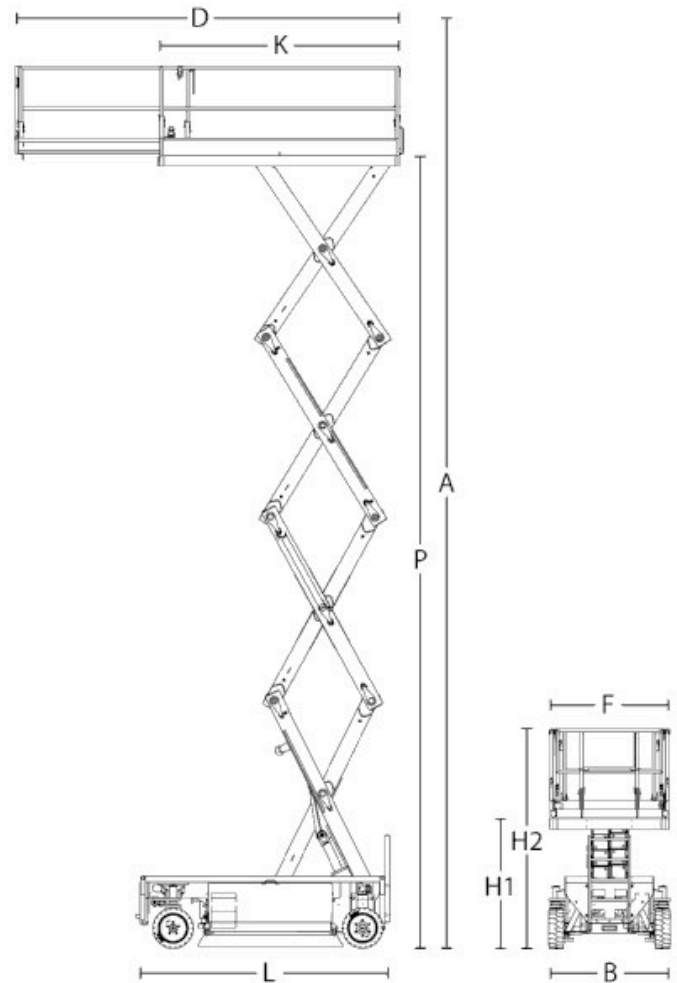

*Technical specifications, prices and images are subject to change.*

